



To learn about other Suncast products, please call
1-855-477-1260 or 1-630-879-2050.




Product Feedback? Email us at: feedbacksuncastcommercial.com

ITEM NUMBER: PUCCS1937/ PUCCS2645 CART SHIELD

PARTS


PUCCS1937/2645 - CART SHIELD - *The Utility Cart shown in the manual is not included and purchased separately

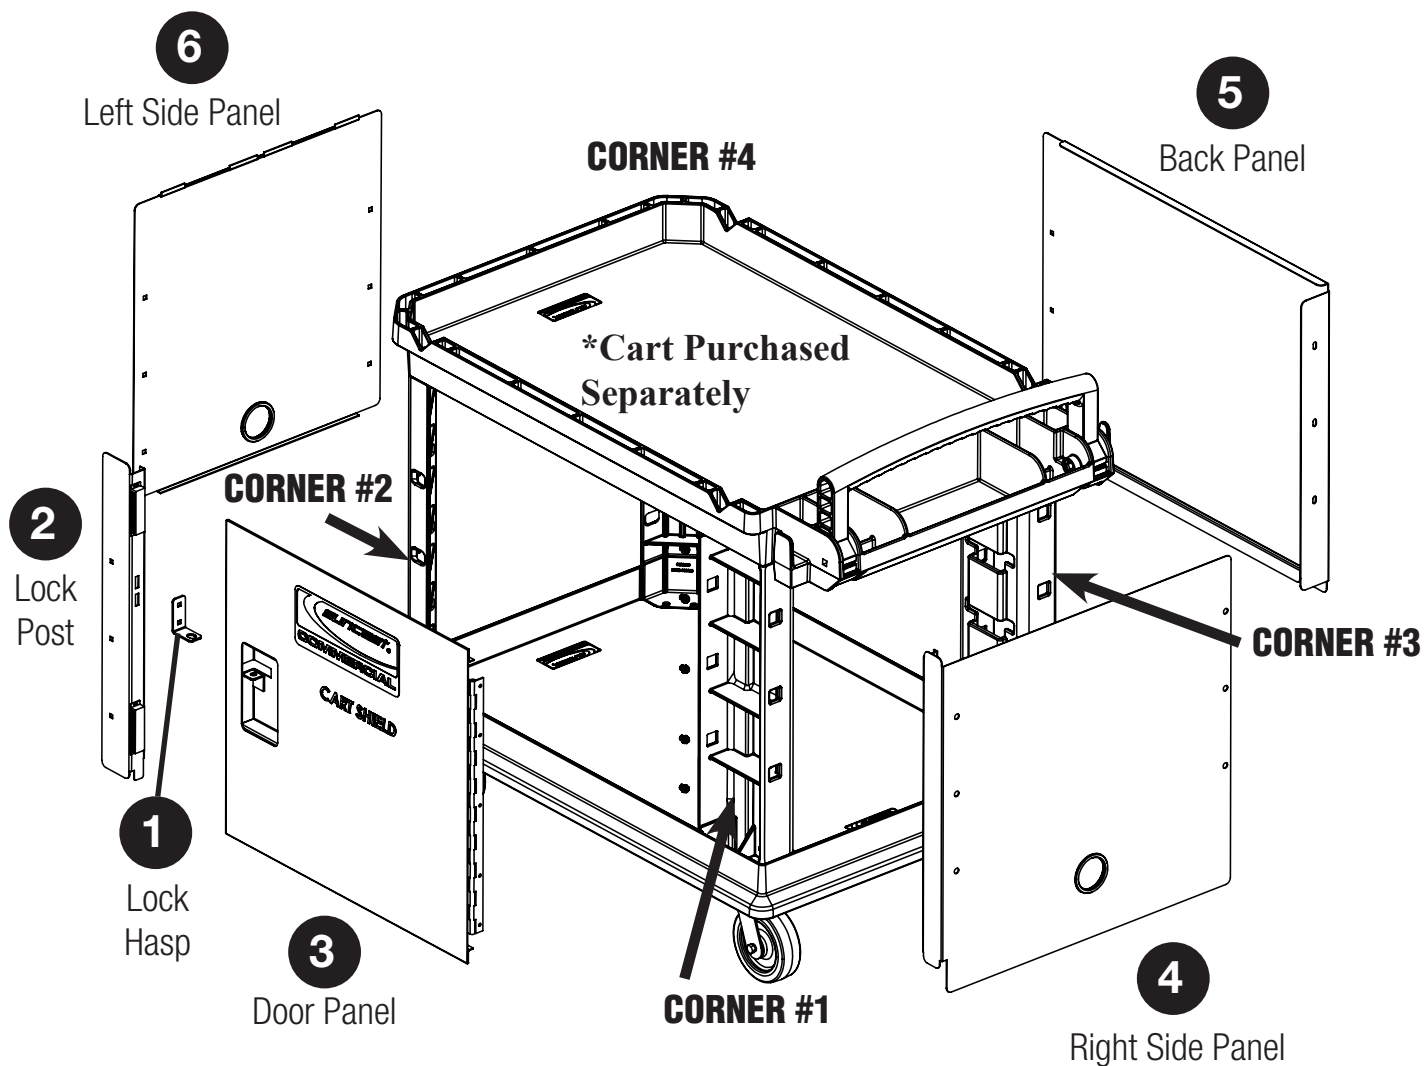

TOOLS NEEDED



Two (2) people
recommended
for assembly





BEFORE YOU BEGIN







- Read instructions thoroughly prior to assembly.
This kit contains parts that can be damaged if assembled incorrectly or in the wrong sequence.
- Please follow instructions.
Suncoast is not responsible for replacing parts lost or damaged due to incorrect assembly.
- Check for all parts before you begin assembly.
Using the provided parts check list, verify that you have all the parts required to construct your cart.
- Assistance may be required during parts of the assembly.




CAUTION

- This product is not a toy and is not intended for use by children.
- Exercise caution when moving fully loaded product.
- Do not sit or stand on top.
- This contains parts that can be damaged if assembled incorrectly or in the wrong sequence. Repair or replace broken parts immediately
- Do not put fuels, flammables, explosives or hazardous materials inside these products.
- Gasoline, solvents, gun powder or other munitions, dynamite, propane, acetylene or other such products can explode if stored inside these products.
- Use these products ONLY for storing and transporting electric or hand tools and equipment, and other similar materials.
- Failure to follow these warnings or modifications or other uses of these products could result in death, serious injury or property damage..


HARDWARE

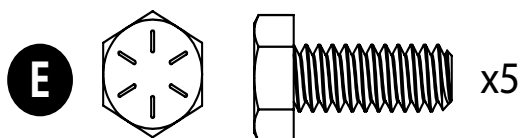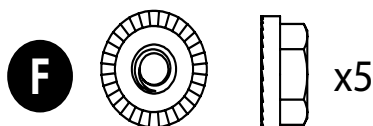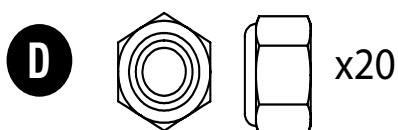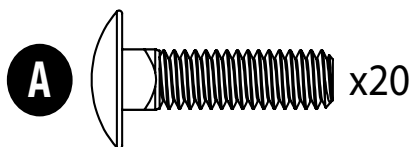


ASSEMBLY

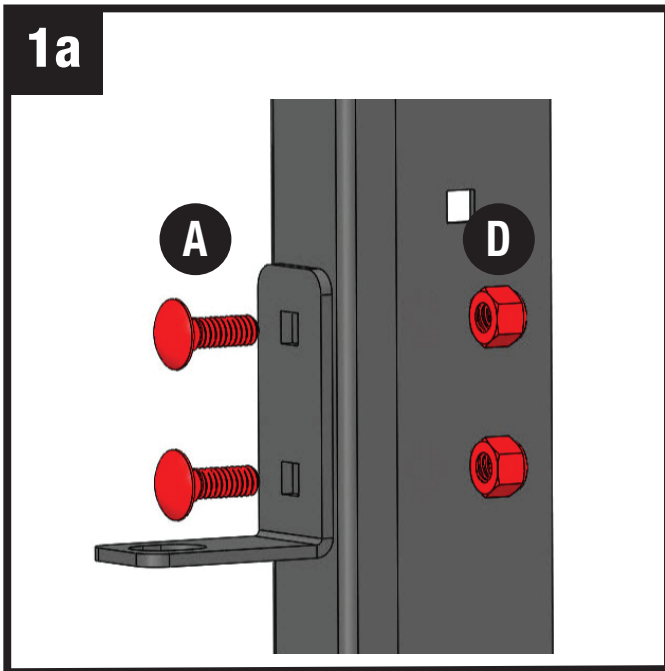


Connect Lock Hasp to Lock Post using (2) Carriage Bolts (A), and (2) Lock Nuts (D). Do not fully tighten, lock hasp height will be adjusted in later step.

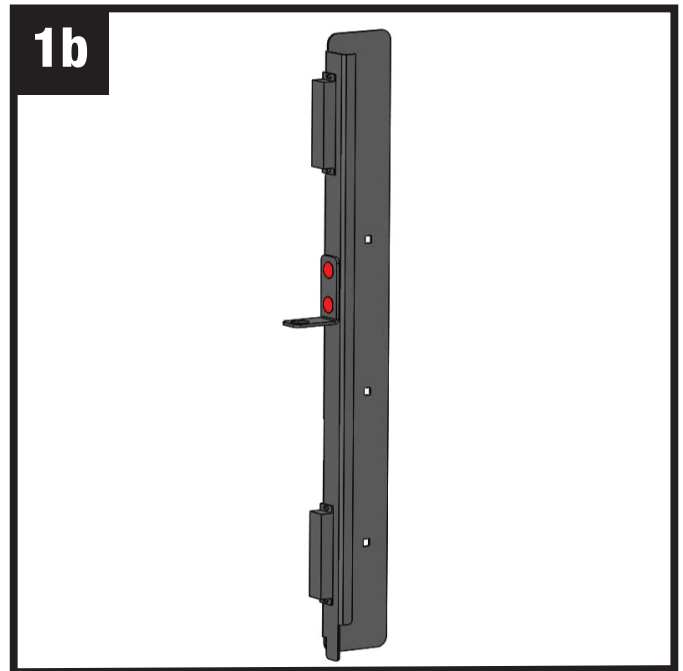

Assembled Lock Post

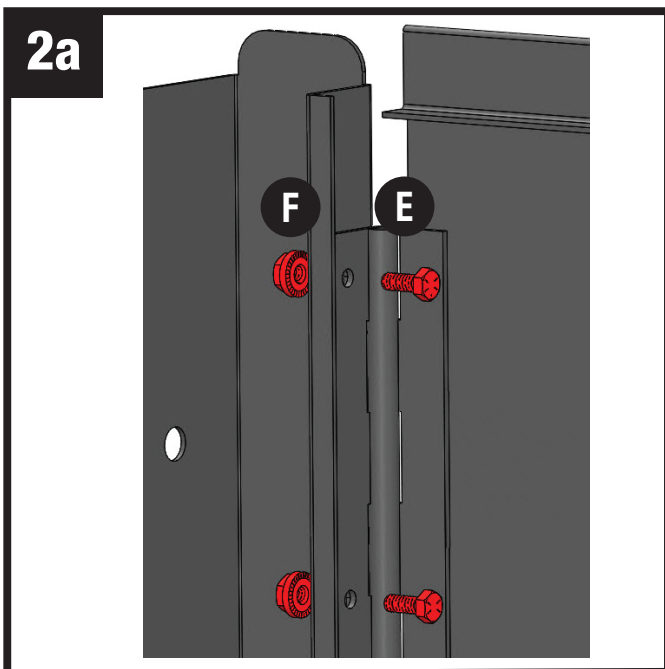


Connect Door to Right side panel using (5) Hex Screws (E), and (5) Serrated Nuts (F). Connect fasteners through hinge.

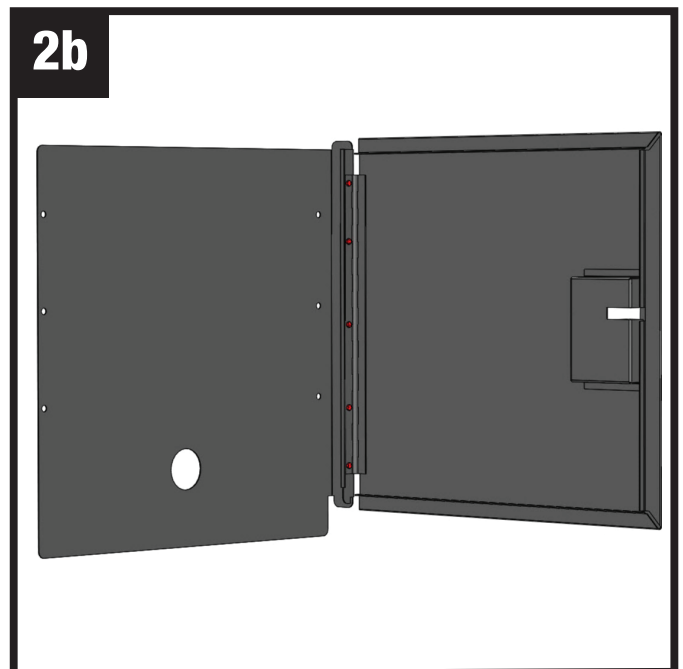

Door and Right-Side Subassembly.

ASSEMBLY

3

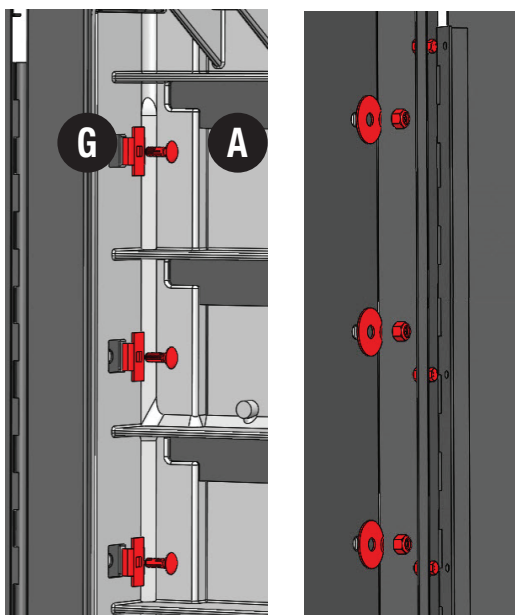


EXTERIOR VIEW

INTERIOR VIEW


Connect Door and Right Side Sub-assembly to INSIDE OF CORNER #1. Connect from top to bottom using (3) Square Washers (G), (3) Carriage Bolts (A), (3) Large Washers (C), and (3) Lock Nuts (D).

4

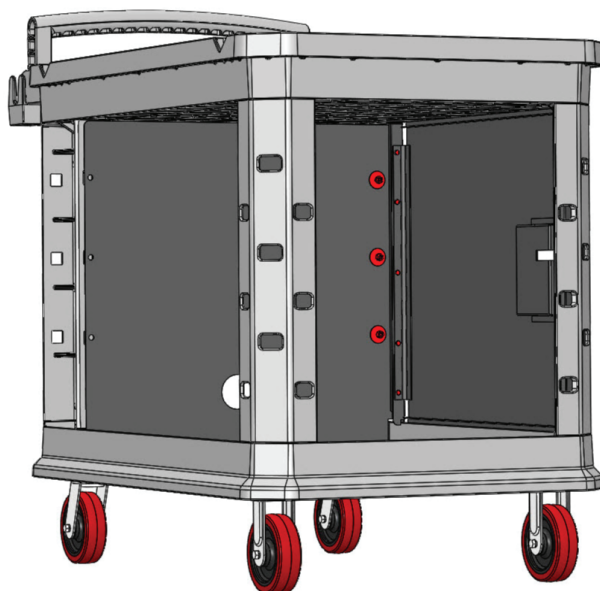


Assembled Door-Right Side Panels to Cart.

5

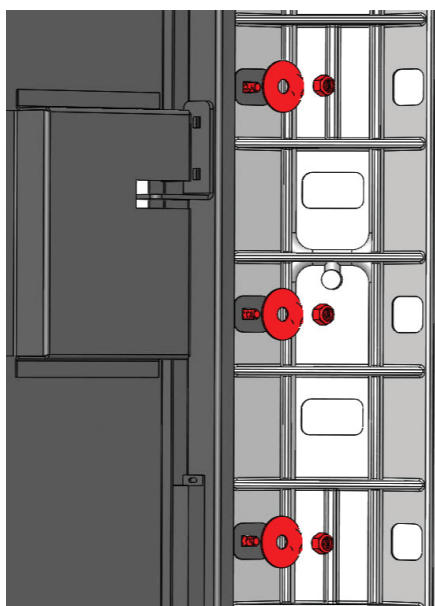

Connect Lock Post to CORNER #2 using (3) Carriage Bolts (A), (3) Large Washers (C), and (3) Lock Nuts (D).

6

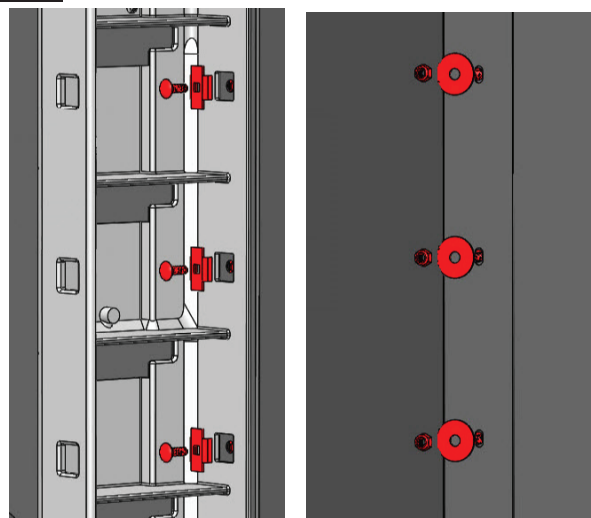


EXTERIOR VIEW

INTERIOR VIEW

Slide Back Panel onto cart platform. Connect Back Panel to CORNER #3 using (3) Square Washers (G), (3) Carriage Bolts (A), (3) Large Washers (C), and (3) Lock Nuts (D).

ASSEMBLY


7

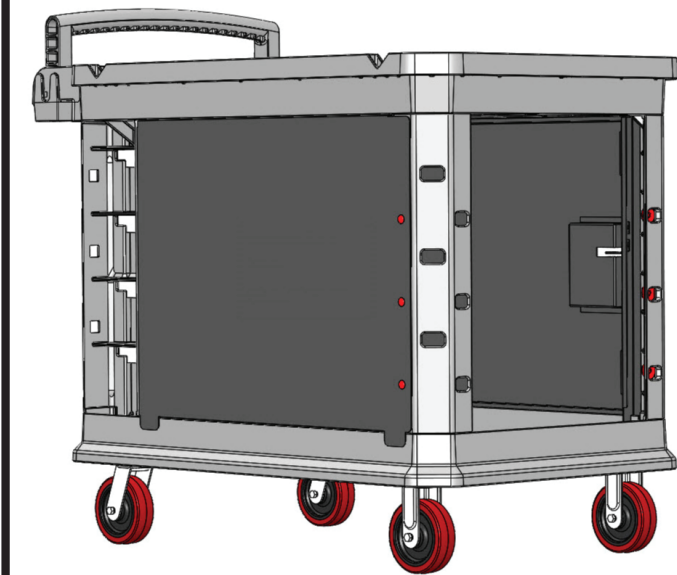

Connect Back Panel to CORNER #3 and Right Side Panel using (3) Carriage Bolts (A), (3) Large Washers (C), and (3) Lock Nuts (D).


Repeat for CORNER #4

8

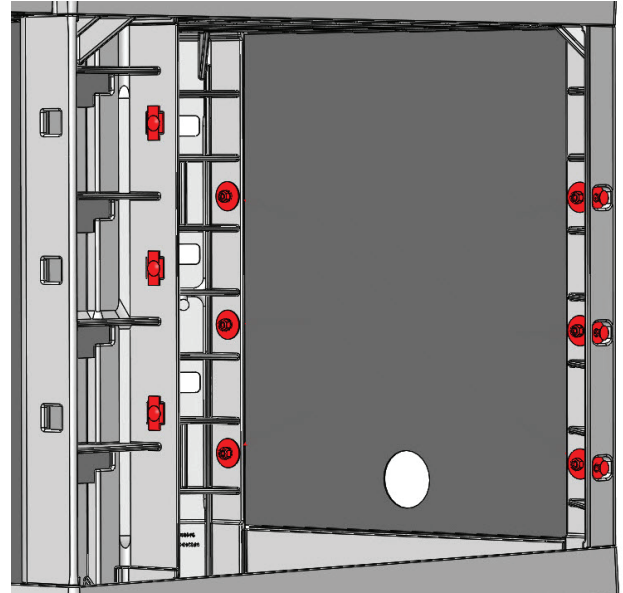

Connect Left Side panel to CORNER #2 and CORNER #4 in six locations, using (6) Carriage Bolts (A), (6) Large Washers (C), and (6) Lock Nuts (D).

9

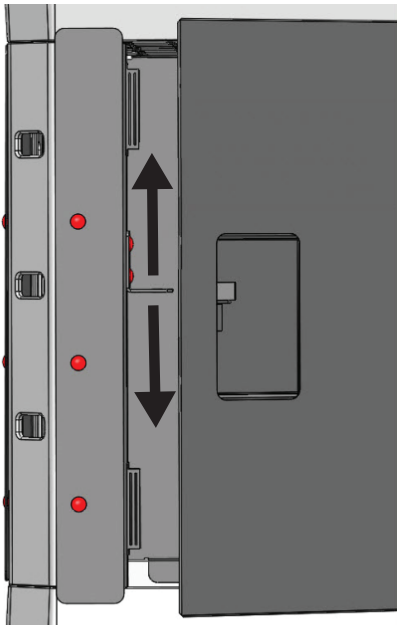

Adjust Lock Hasp up and/or down. Close door and confirm there is no interference. Fully tighten Lock Hasp.

10



Complete.